



Block

Top Performance Tag for Library and Media Management Applications

Smartrac's BLOCK inlays and tags featuring NXP ICODE ILT-M IC are designed to allow close stacking or contact that confuses other inductively coupled HF and LF tags.

BLOCK tags and inlays with NXP ICode ILT-M ICs offer two key benefits. Firstly, they have excellent performance in document and item identification where close stacking occurs, which is a challenging environment for other passive protocols. Secondly, BLOCK tags and inlays also work well in applications where very fast inventory of multiple tags in the field occurs. In these cases, BLOCK tags offer performance approaching UHF EPC Class 1 Gen 2.

Smartrac's inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management. This ensures a reliable and state-of-the-art product that meets a variety of application needs, where high performance is a critical parameter.

Overview

Operating Frequency

13.56 MHz

Integrated Circuit (IC)

NXP ICODE ILT-M

Antenna Size

45 × 45 mm / 1.77 × 1.77 in

Die-cut Size

48 × 48 mm / 1.89 × 1.89 in

International Standards

▶ ISO 18000-3 Mode 3

Application Areas


- ▶ Media & Document Management
- ▶ Healthcare
- ▶ Electronics & Gaming

BLOCK

Top Performance Tag for Library and Media Management Applications

Technical Features			
IC + Memory* NXP ICODE ILT-M 512 bit	Size	Format*	Sales Code
	45 × 45 mm / 1.77 × 1.77 in	dry	3002458
	48 × 48 mm / 1.89 × 1.89 in	wet	3002297
Operating Temperature	-40°C to 85°C / -40°F to 185°F		
Bending Diameter (D)	> 50 mm, tension max. 10 N		
Adhesive	Acrylic, water borne adhesive, usage temperature: min. -20°C to 80°C / min. -4°F to 176°F		
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing		

* Additional product configurations are available upon request.

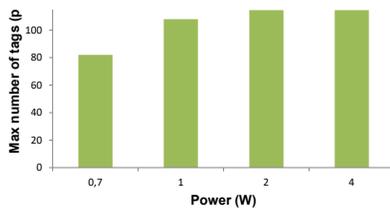

Smartrac uses three different qualification methods to evaluate the quality and reliability of RFID inlay and tag products. Products are tested according to IEC 60068-2-67 (temperature and humidity), JESD22-A104-B (temperature cycling) and an in-house developed bending test. All the graphs are indicative: performance in real life applications may vary.

Smartrac N.V. · Strawinskyiaan 851 · 1077 XX Amsterdam · The Netherlands

Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155

Contact: Sales & Customer Service

smartrac-group.com/contact



© 2019 Smartrac N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.



05/2017 EN I&T 0062