

Eagle Wet Inlay


EPC Class 1 Gen 2, ISO 18 000-6C

NXP UCode 8

Sales code 3007256

### Mechanical dimensions

A1 x A2	Antenna size	44 x 28 mm	± 0,5 mm	1,732 x 1,102 in
B1 x B2	Die-cut size	47 x 31 mm	± 0,2 mm	1,850 x 1,220 in
C	Web width	50 mm	± 0,5 mm	1,969 in
D	Pitch, length per piece MD	34 mm	± 1,5 mm	1,339 in
E	Die-cut to web edge	1,5 mm	± 1,5 mm	0,059 in
U	Die-cut corner radius	3 mm	± mm	0,118 in

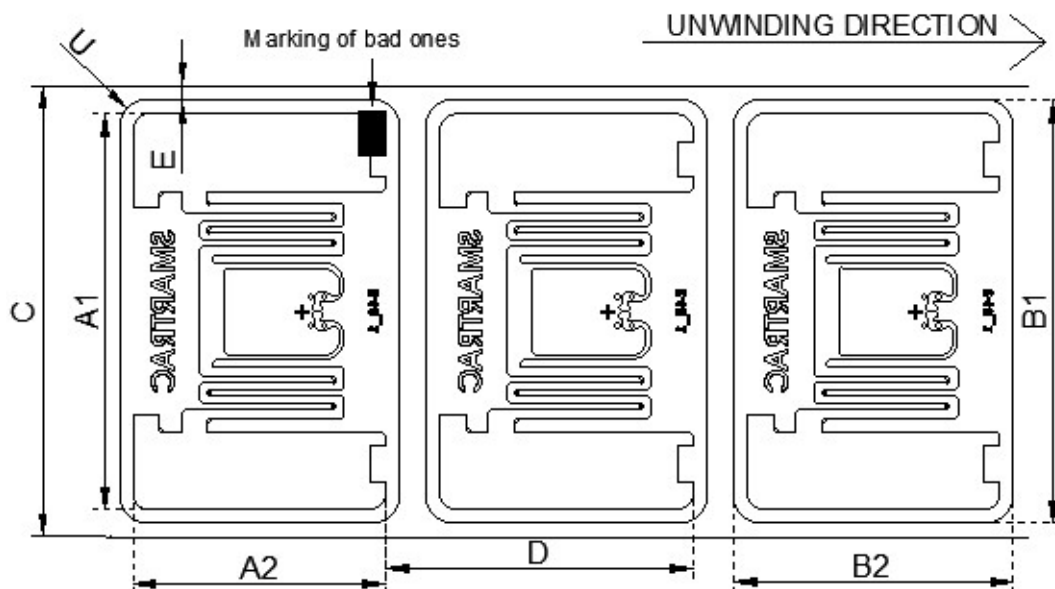

### Electrical characteristics

Integrated Circuit (IC)	NXP UCode 8
Air interface protocol	EPC Class 1 Gen 2, ISO 18000-63
Operation frequency	860 - 960 MHz
Memory	128 bit EPC


### General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

### Delivery form

Transponder format	Die-cut	
Transponder face material	Clear PET 50	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-5	
- labelling temperature	min. +0 °C	min. 32 °F
- usage temperature	-20 °C - 80 °C	-4 °F - 176 °F
- peel	min. 10 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	97 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	

### Structure

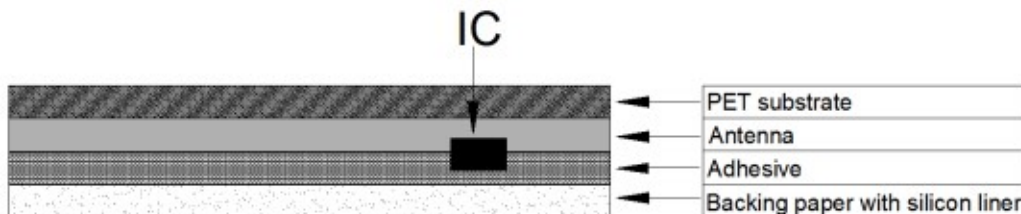

### Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Winding of the reel	Face out
Reel size	15000 pcs/reel
Package size	30 000 pcs/box Deliveries only in full packages.

**Disclaimer:**

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

This technical specification replaces all earlier ones.

Version	2
Update date	25 September 2019
Author	SMARTRAC / BSchupler
Approved	SMARTRAC / 25/09/2019 MHasani

